







320W Constant Voltage + Constant Current LED Driver

















Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty

Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


■ GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

HLG-320H series is a 320W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-320H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-320H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding



Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
С		Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



SPECIFICATION

MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54				
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A				
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W				
	RIPPLE & NOISE (max.) Note.2	-	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
		Adjustable for A/C-Type only (via built-in potentiometer)												
OUTPUT	VOLTAGE ADJ. RANGE	10.8 ~ 13.5V		17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V				
					t-in potentiom		02 001	100 .01	10 021	10 001				
	CURRENT ADJ. RANGE	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A		5.35 ~ 10.7A	4 45 ~ 8 9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95				
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	± 0.5%	± 0.5%	±0.5%				
	HOLD UP TIME (Typ.)													
	TIOLD OF TIME (Typ.)	15ms / 115VAC, 230VAC 90 ~ 305VAC 127 ~ 431VDC												
	VOLTAGE RANGE Note.5				IC" section)									
INPUT -	EDECHENCY DANCE	(Please refer to "STATIC CHARACTERISTIC" section)												
	FREQUENCY RANGE	47 ~ 63Hz	\/AC DE>0.0	E/220\/AC DE	>0.04/277\/\	C @ full load								
	POWER FACTOR (Typ.)				≥0.94/277VA(•								
		<u> </u>		, ,	ARACTERISTI	,	0)							
	TOTAL HARMONIC DISTORTION	THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC) (Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)												
	EFFICIENCY (Town) (COOMs -)	·			, ,		0.4.50/	050/	050/	050/				
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%				
	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%				
	AC CURRENT (Typ.)	3.5A / 115VAC 1.65A / 230VAC 1.45A / 277VAC												
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010µs measured at 50% lpeak) at 230VAC; Per NEMA 410												
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC												
	LEAKAGE CURRENT	<0.75mA / 277VAC												
	OVER CURRENT Note.4	95 ~ 108%												
		Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Hiccup mode,	recovers auto	matically after	fault condition	is removed								
PROTECTION	OVERVOLTAGE	14 ~ 17V	17.5 ~ 21V	22.5 ~ 27V	27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V				
	OVER VOLTAGE	Shut down an	d latch off o/p	oltage, re-pow	ver on to recove	er								
	OVER TEMPERATURE	Shut down and latch off o/p voltage, re-power on to recover												
	WORKING TEMP.	Tcase= -40 ~	+90°C (Pleas	e refer to "OU"	TPUT LOAD vs	TEMPERATU	IRE" section)							
ENVIRONMENT	MAX. CASE TEMP.	Tcase=+90°C												
	WORKING HUMIDITY	20 ~ 95% RH	non-condensir	ıg										
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH												
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)												
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes												
		UL8750(type"HL"), CSA C22.2 No. 250.0-08; BS EN/EN/AS/NZS 61347-1, BS EN/EN/AS/NZS 61347-2-13 independent;												
	SAFETY STANDARDS	GB19510.1,GB19510.14; IP65 or IP67 (except for HLG-320H C-type); J61347-1, J61347-2-13 (except for B,AB,C and D-type),												
		EAC TP TC 004;KC61347-1,KC61347-2-13(except for AB,C-type), BIS IS 15885(Part2/Sec13) (NOTE 13) approved												
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC												
		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH												
SAFETY &	ISOLATION RESISTANCE	Compliance to BS EN/EN55015, BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class C (@ load≥50%);												
	EMC EMISSION				25 1 FAC TP T	BS EN/EN61000-3-3,GB/T 17743 , GB17625.1,EAC TP TC 020 Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity								
SAFETY & EMC		BS EN/EN610 Compliance to	000-3-3,GB/T 1 BS EN/EN61	7743 , GB1762 000-4-2,3,4,5,6	6,8,11, BS EN/I		N/EN55024, li	ght industry le	vel (surge imm	unity				
	EMC EMISSION EMC IMMUNITY	BS EN/EN610 Compliance to Line-Earth 4K	000-3-3,GB/T 1 0 BS EN/EN61 V, Line-Line 2	7743 , GB1762 000-4-2,3,4,5,6 (V), EAC TP TO	6,8,11, BS EN/I C 020	EN61547, BS E			vel (surge imm	unity				
	EMC EMISSION	BS EN/EN610 Compliance to	000-3-3,GB/T 1 0 BS EN/EN61 V, Line-Line 2	7743 , GB1762 000-4-2,3,4,5,6 (V), EAC TP TO	6,8,11, BS EN/I	EN61547, BS E	:N/EN55024, li		vel (surge imm	unity				
	EMC EMISSION EMC IMMUNITY	BS EN/EN610 Compliance to Line-Earth 4K	000-3-3,GB/T 1 DBS EN/EN61 V, Line-Line 2 nin. Telcord	7743 , GB1762 000-4-2,3,4,5,6 (V), EAC TP TO	6,8,11, BS EN/I C 020	EN61547, BS E			vel (surge imm	unity				


320W Constant Voltage + Constant Current LED Driver

NOTE

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75 °C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
- 13. BIS certification is for HLG-320H-A only, but products sourced from Taiwan do not have the BIS logo, please contact your MEAN WELL sales for more information.


■ BLOCK DIAGRAM

Fosc: 65KHz

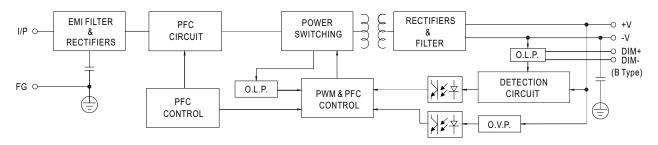

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.




Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"

 \bigcirc Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


Applying additive resistance:

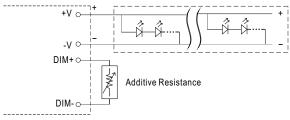


"DO NOT connect "DIM- to -V"








Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

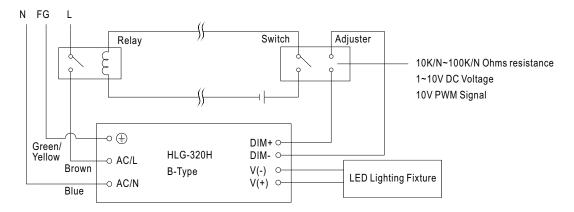


Using a switch and relay can turn ON/OFF the lighting fixture.




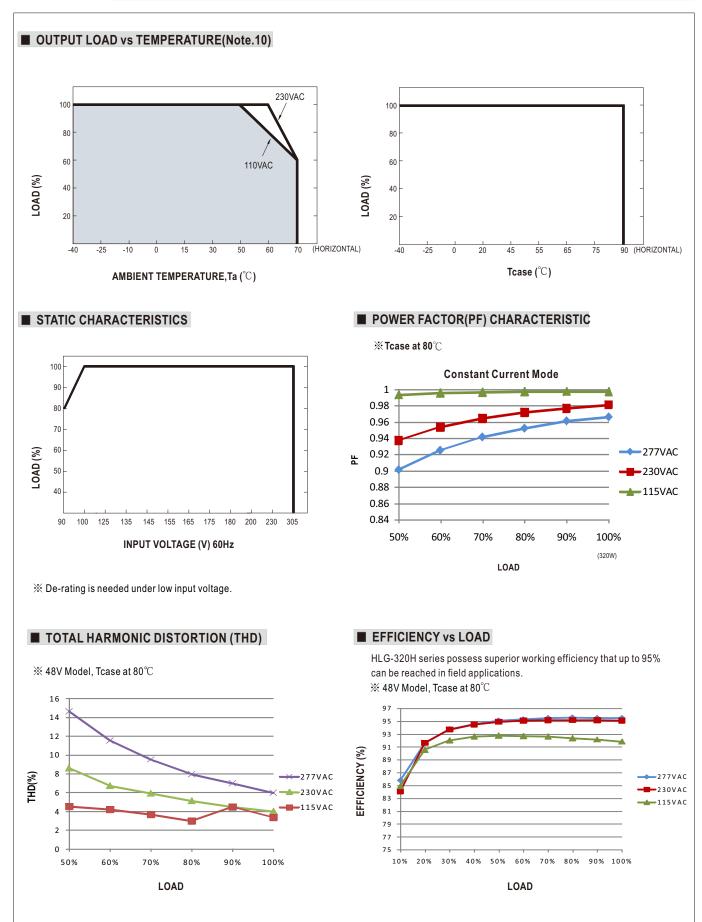


■ LIFETIME

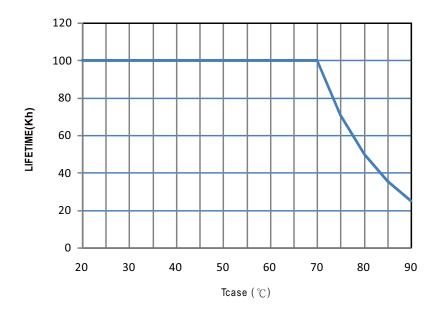



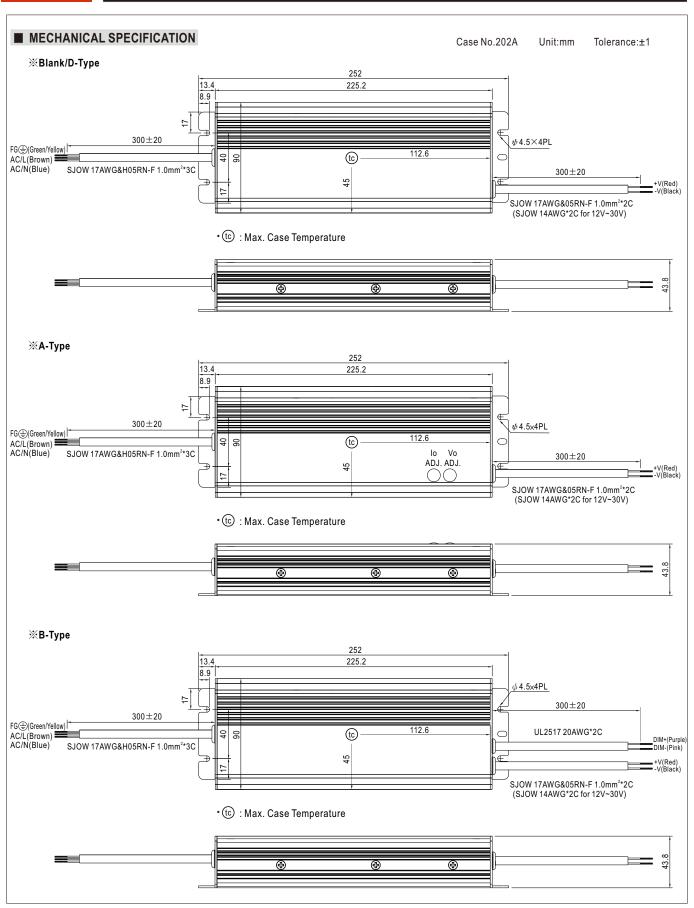



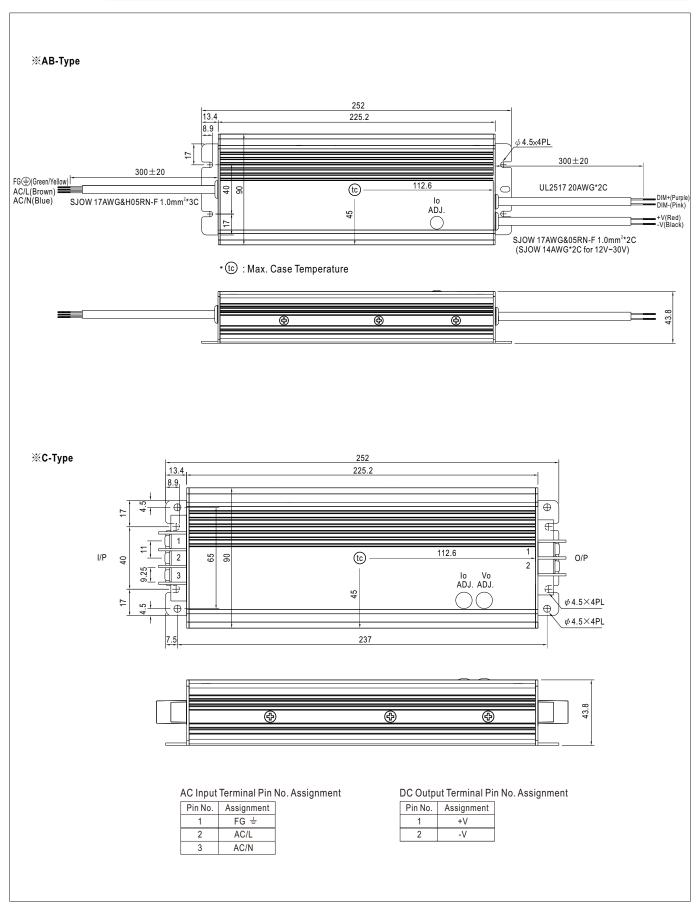





■ WATERPROOF CONNECTION

Waterproof connector

 $Water proof connector can be assembled on the output cable of HLG-320H \ to operate in \ dry/wet/damp \ or outdoor \ environment.$

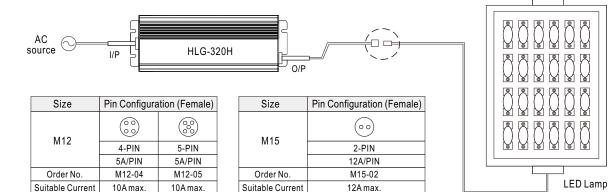


X Cable Joiner

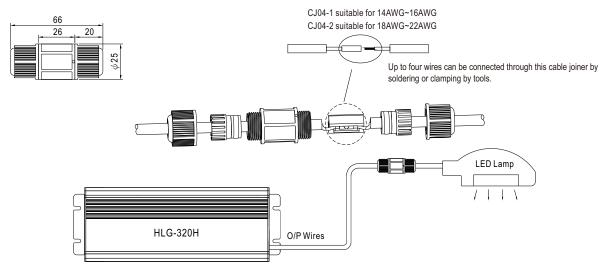

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

X Junction Box Option

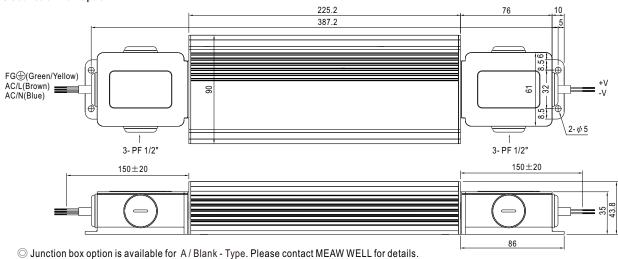

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html